Valcourt

BIRCH WOOD LOGS WITH BLACK GLOWING WOOL

AC04352

FOR USE ON FG00004, FG00040 & FG00007 (S42) FIREPLACE

INSTALLATION INSTRUCTIONS

ENGLISH

⚠ WARNING

If the information in these instructions are not followed exactly, a fire or explosion may result causing property damage, personal injury or loss of life.

- **Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.**
- **WHAT TO DO IF YOU SMELL GAS**
  - **Do not try to light any appliance.**
  - **Do not touch any electrical switch; do not use any phone in your building.**
  - **Leave the building immediately.**
  - **Immediately call your gas supplier from a neighbor's phone. Follow the gas supplier's instructions.**
  - **If you cannot reach your gas supplier, call the fire department.**
- **Installation and service must be performed by a qualified installer, service agency or the gas supplier.**

NOTICE: Ceramic fiber logs may differ in appearance from those shown in this manual.

SAFETY TESTED
ACCORDING TO ANSI Z21.88-2017
AND CSA 2.33-2017 STANDARDS
BY AN ACCREDITED LABORATORY.

⚠ WARNING

If not installed, operated and maintained in accordance with the manufacturer's instructions, this product could expose you to substances in fuel or from fuel combustion which can cause death or serious illness.

INSTALLER: LEAVE THIS MANUAL WITH THE COMPLIANCE.

CONSUMER: READ AND KEEP THIS MANUAL FOR REFERENCE

Printed in Canada

46291A
2021-11-11

AC04352 LOG SET IDENTIFICATION

INDEX LETTER & DESCRIPTION	PART NUMBER	FRONT VIEW	TOP VIEW
(A) FRONT LEFT LOG	22438		
(B) FRONT RIGHT LOG	22439		
(C) REAR CROSSOVER LOG	22440		
(D) REAR LOG	22441		
(E) SMALL LEFT LOG	22442		
(F) LEFT CROSSOVER LOG	22443		
(G) RIGHT CROSSOVER LOG	22444		

ENGLISH

LOG SET INSTALLATION PREPARATION

The colors of the logs in the following images may differ from the birch logs but the positioning of the logs remains the same.

LOG PLACEMENT

The positioning of logs is critical to safe and clean operation of this fireplace. Sooting and other problems may result if the logs are not properly and firmly positioned in the fireplace.

BEFORE BEGINNING THE INSTALLATION:

1. Remove the *Invisimesh* barrier and glass door on fireplace using instructions from the fireplace manual.
2. Install liner kit before the logset. See the liner instructions manual for further information.
3. Place logs in position as shown in Figure 1 and the following pages.

DO NOT force holes into the logs. Install using the holes and pins located in each log.

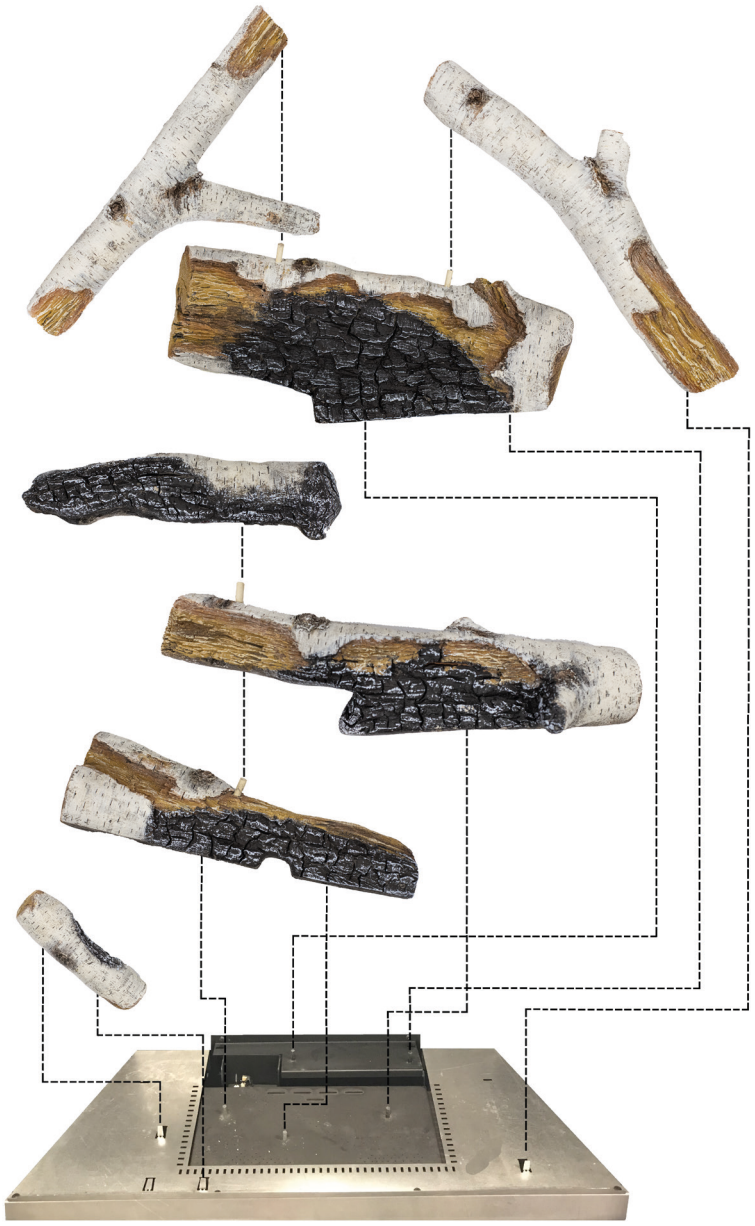

Figure 1: Log placement

LOG SET INSTALLATION PREPARATION

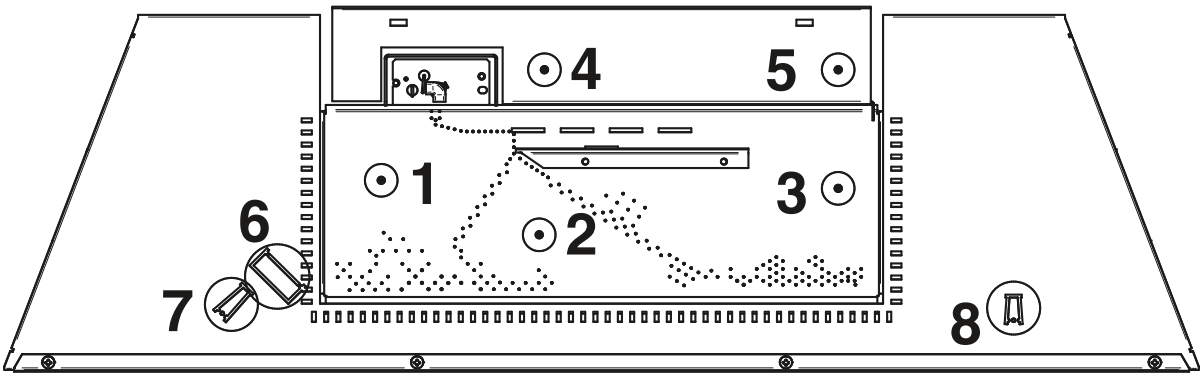

Figure 2: Pins and tabs location

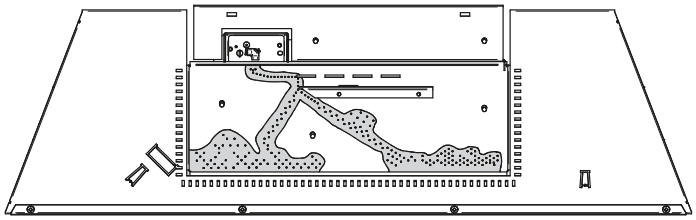

Figure 3: Allowed area for glowing wool placement

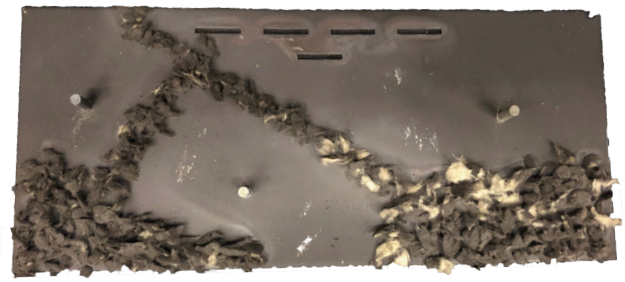

Figure 4: Picture of the glowing wool placed on the burner

⚠ WARNING

Apply loose material (glowing wool) per instruction manual. DO NOT apply extra material not supplied with this kit. All previously applied loose material (glowing wool) must be removed prior to reapplication. Do not cover the burner's upper rectangular ports with loose material (glowing wool). Do not apply all the glowing wool supplied with this kit. Refer to the figure 4 to see how much glowing wool should be apply.

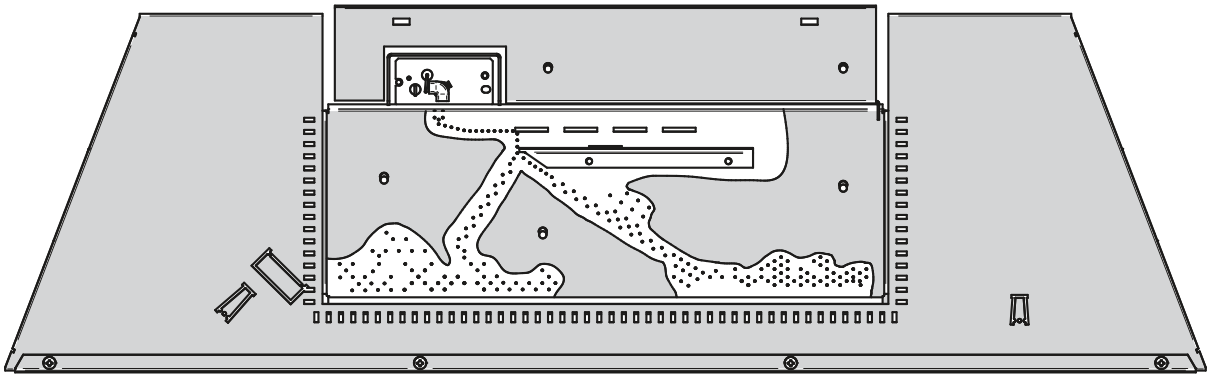

Figure 5: Allowed area for lava rocks (AC04381) placement.

LOG SET PLACEMENT

STEP 1: Lift the tabs 6, 7 and 8 located on the burner cover as shown in figure 2.

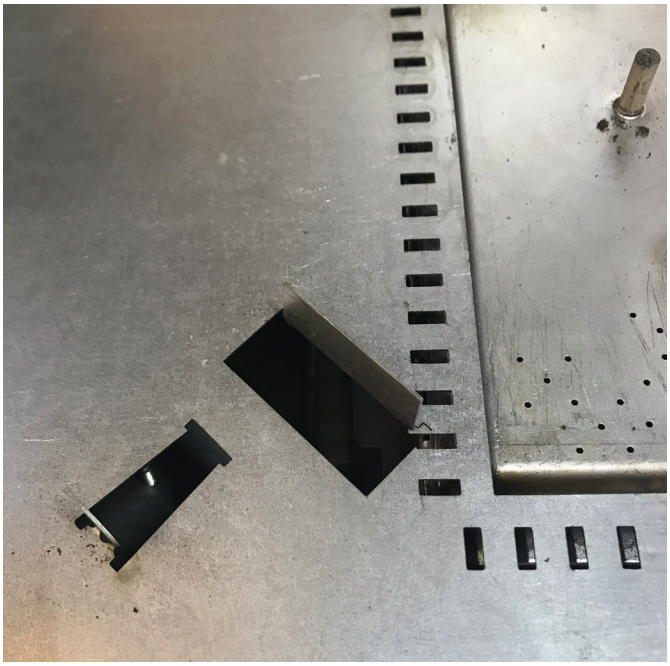

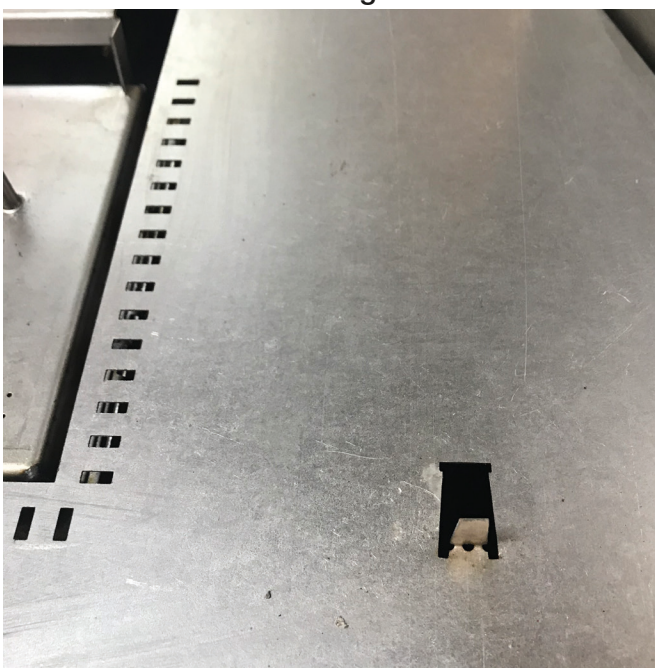

STEP 2: Put the log A on the pins 1 and 2 located on the burner.

LOG SET PLACEMENT

ENGLISH

STEP 3: Put the log B on the pin 3 located on the burner and on the pin on top of log A.

STEP 4: Put the log C on the pin on top of log B and on the left side of the pilot.

LOG SET PLACEMENT

STEP 5: Put the log D on the pins 4 and 5 located on the log support.

LOG SET PLACEMENT

ENGLISH

STEP 6: Put the log E on tab 6 located on the burner cover.

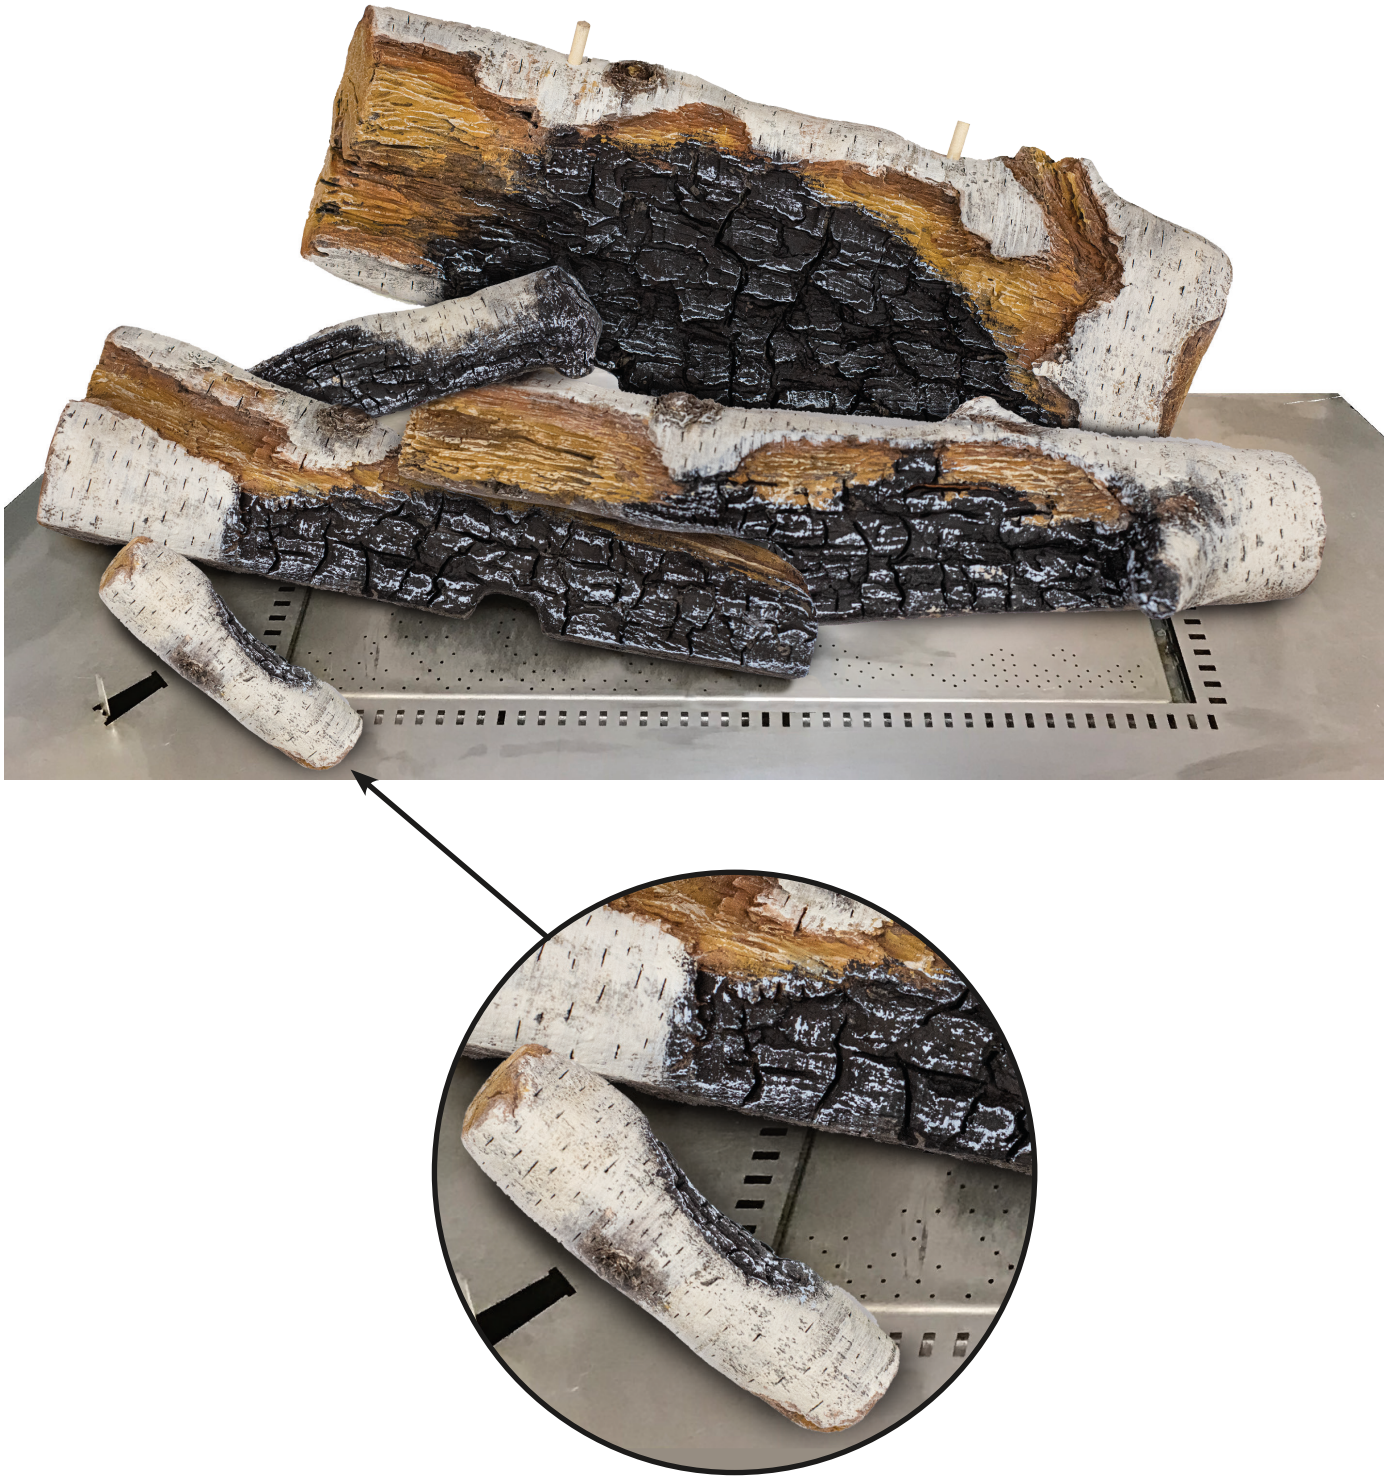

LOG SET PLACEMENT

STEP 7: Put the log G on the pin on the top right of log D and on tab 8 located on the burner cover.

ENGLISH

LOG SET PLACEMENT

STEP 8: Put the log F on the pin on the top left of log D and on tab 7 located on the burner cover.

STEP 9: This completes the log set installation. Display the glowing wool in the designated areas as shown in figure 3 all around the circular ports. Use pieces not bigger that a 10 cent coin. Display the lava rocks in the designated areas as shown on figure 4. Reinstall the glass door and *Invisimesh* barrier as indicated in the fireplace manual.

This document is available for free download on the manufacturer's website. It is a copyrighted document. Resale is strictly prohibited. The manufacturer may update this document from time to time and cannot be responsible for problems, injuries, or damages arising out of the use of information contained in any document obtained from unauthorized sources.

Valcourt

Stove Builder International inc.
250, De Copenhague street,
St-Augustin-de-Desmaures (Québec), Canada
G3A 2H3
418-908-8002